



BUTTERFLY VALVE W DN65 PN16


Wafer type - bare stem

M33712
702702

DESCRIPTION: Nodular Cast Iron body, vulcanized liner wafer type butterfly valve with Aluminium Bronze disc. Centric free stem with standardized pattern for actuator mounting. Can handle negative pressure (vacuum), due to the meticulous vulcanization process.

STANDARD & DESIGN:

End Standard	EN 1092-2
Face To Face Standard	EN 558, series 20
Inspection Standard	EN 12266
Remark	Multiflange: PN6/10/16/25, ANSI150, JIS5K/10K
Min temperature	-30°C
Top Flange Standard	ISO 5211 - F07
Max temperature	+180°C
Variant	Bare stem
End Type	Wafer
Design Code	EN 593
Standard	DIN
Material Seat	FPM/FKM
Material Disc	Aluminium Bronze
Material Body	Nodular Cast Iron, GGG40
Sub Category	BUTTERFLY
Item Number	M33712
Category	Valve

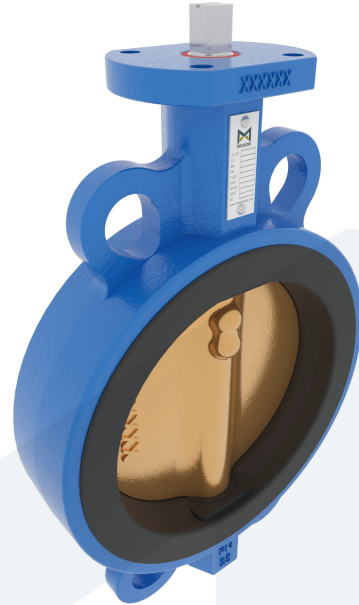

No	Part	Material	Code	Application
2	Disc	Aluminium Bronze		Cargo oil
3	Seat	FPM/FKM max working temp. 180°C		Corrosive fluids
4	Stem	Stainless Steel	1.4401	Flammable hydraulic oil
5	Pin	Duplex Stainless Steel	1.4462	Fuel oil
1	Body	Nodular Cast Iron	GGG40	Lubricating oil Non-flammable hydraulic fluid

DN	Pressure Rating Id	Ø D	L	Kg	H1	Ø D2	H2	S	H3
65	16	107	46	3.1	86	90	126	11	19

