



SWING CHECK VALVE DN125 PN16

Swing check valve DN125 PN16

60-00000538
370252

DESCRIPTION: Cast Iron body, full bore swing check valve. Raised face flanges.



STANDARD & DESIGN:

End Standard	EN 1092-2
Face To Face Standard	EN 558, series 48
Remark	Connection: PN16
Min temperature	-10°C
Max temperature	+120°C
Throughput Direction	Straight
Execution	Full Bore
End Type	Flanged
Design Code	DIN 3232
Standard	DIN
Material Seat	Bronze
Material Disc	Nodular Cast Iron, GGG40.3
Sub Category	CHECK
Item Number	60-00000538
Category	Valve



No	Part	Material	Code	Application
1	Body	Cast Iron	GG25	Air
2	Bonnet	Cast Iron	GG25	Cargo oil
3	Body seat	Bronze	CC 491K	Flammable hydraulic oil
4	Disc	Nodular Cast Iron	GGG40.3	Fuel oil
5	Disc sealing	Bronze		Gas
6	Stem	Brass	CW 614N	Lubricating oil
7	Hinge arm	Nodular Cast Iron	GGG40.3	Sea water
8	Bonnet gasket	Asbestos Free		Water

DN	Pressure Rating Id	nxdd	Hcd	Ø D	L	Kg
125	16	8x18	210	250	350	37

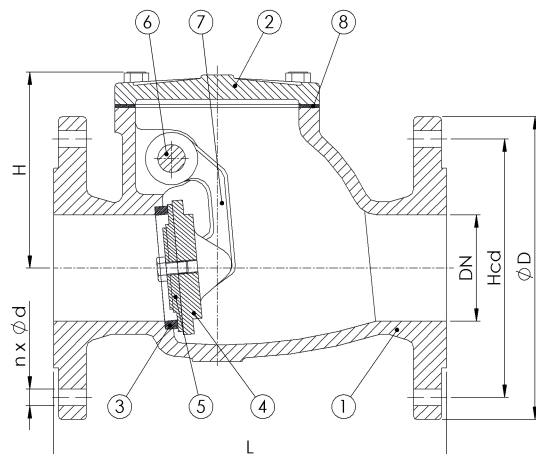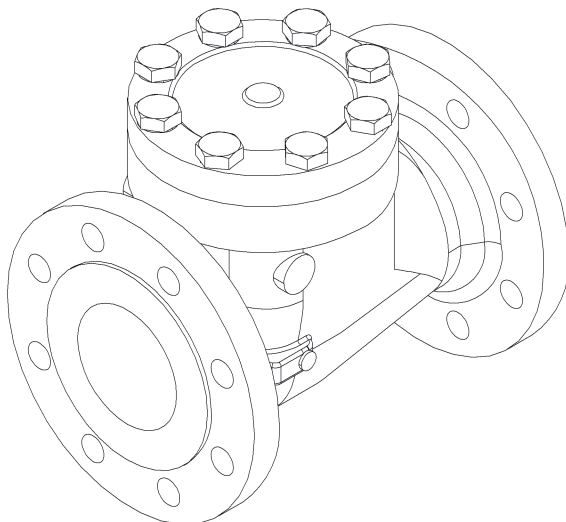

2023-01-01