



# FIRE VALVE DN65 PN16


90-00000007  
355922

Angled (30°) type

**DESCRIPTION:** Bronze RG5 body soft sealing fire valve. Rising stem with screwed and secured bonnet. Angled (30° from flange) hose connection. Flat face flanged inlet, BSP male threaded outlet.

**STANDARD & DESIGN:**

End Standard	EN 1092-3 (Inlet), ISO 228-1 (Outlet)
Remark	Connection: PN16
Min temperature	-10°C
Max temperature	+60°C
Throughput Direction	Angled (30°)
End Type	Flanged/Threaded
Standard	DIN
Material Seat	NBR
Material Disc	Brass
Material Body	Bronze
Sub Category	FIRE
Item Number	90-00000007
Category	Valve

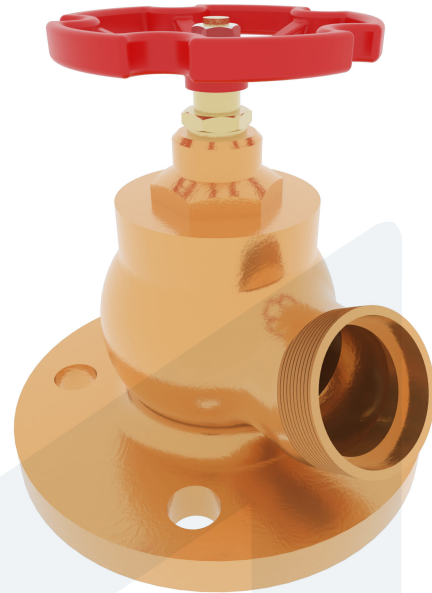

No	Part	Material	Code	Application
1	Body	Bronze	CC 491K	Sea water
2	Bonnet	Brass	CW 614N	Water
3	Disc	Brass	CW 710R	
4	Seat disc	NBR		
5	Stem	Brass	CW 710R	
6	Bonnet gasket	Asbestos Free		
7	Handwheel	Cast Iron	GG25	

DN	Pressure Rating Id	nxdd	Hcd	Ø D	L	Kg	H	G	Ø M
65	16	4x18	145	185	105	5.4	230	2 1/2"	120

