



FIRE VALVE DN50 PN16

Straight type - with Storz-C coupling, cap and chain

90-00000015
356622

DESCRIPTION: Bronze RG5 body soft sealing fire valve. Rising stem with bolted bonnet. Straight hose connection. Raised face flanged inlet, BSP male threaded outlet. With Storz-C coupling, cap and chain.

STANDARD & DESIGN:

End Standard

Face To Face Standard

Remark

Max temperature

Throughput Direction

End Type

Design Code

Standard

Material Seat

Material Disc

Material Body

Sub Category

Item Number

Category

EN 1092-3 (Inlet), ISO 228-1

(Outlet)

DIN 86211

Connection: PN16

+60°C

Straight

Flanged/Threaded

DIN 86211

DIN

NBR


Brass

Bronze

FIRE



90-00000015

Valve

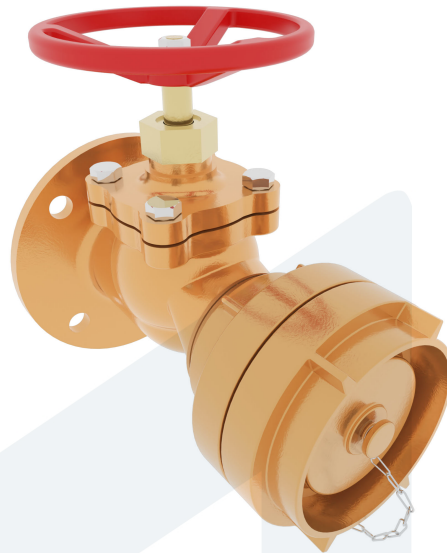

No	Part	Material	Code	Application
9	Coupling	Bronze/Brass	CC 491K/CW 614N	Sea water
3	Disc	Brass	CW 614N	Water
4	Disc sealing ring	NBR		
5	Stem	Brass	CW 614N	
6	Bonnet gasket	Asbestos Free		
7	Gland packing	Graphite		
8	Handwheel	Cast Iron	GG25	
1	Body	Bronze	CC 491K	
2	Bonnet	Bronze	CC 491K	

DN	Pressure Rating Id	nxdd	Hcd	Ø D	L	Kg	L1	H	Ø M
50	16	4x18	125	165	165	7	225	181	140

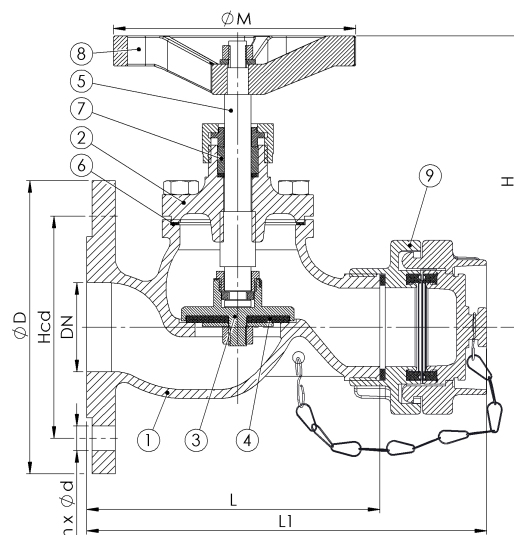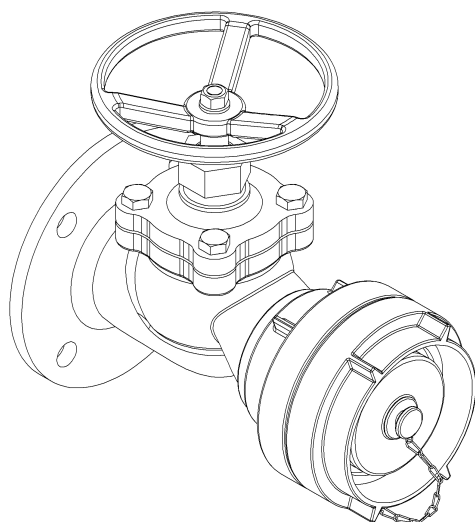

2022-11-09