



# BALL VALVE DN15 PN16


Straight type - with direct mounting pad

20-0000285  
445122

**DESCRIPTION:** Two piece, full bore, RG5 body ball valve with Hard Chromed Brass ball and CPTFE seat. Raised face flanges. With direct mounting pad.

**STANDARD & DESIGN:**

End Standard	EN 1092-3
Face To Face Standard	EN 558, series 14
Inspection Standard	EN 12266
Remark	Connection: PN16
Min temperature	-10°C
Top Flange Standard	ISO 5211 - F04
Max temperature	+150°C
Throughput Direction	Straight
Execution	Full Bore
End Type	Flanged
Design Code	EN 1983
Standard	DIN
Material Seat	CPTFE
Material Body	Bronze
Sub Category	BALL
Item Number	20-0000285
Category	Valve

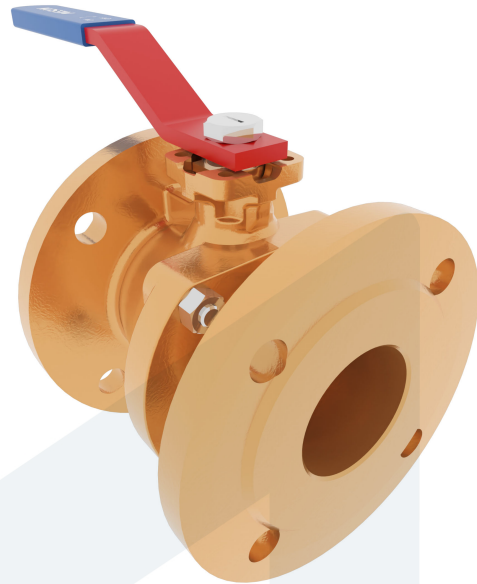

No	Part	Material	Code	Application
1	Body	Bronze	CC 491K	Air
2	Cap	Bronze	CC 491K	Boiler feedwater
3	Ball	Brass, Chrome-Plated	CW 617N	Cargo oil
4	Seat	CPTFE		Condensate
5	Stem	Brass, Chrome-Plated	CW 617N	Flammable hydraulic oil
6	Handle	Carbon Steel, Epoxy Coated		Fuel oil
				Gas
				Lubricating oil
				Non-flammable hydraulic fluid
				Sea water
				Water

DN	nxdd	Hcd	Ø D	L	Kg	L1	H	H1	Ø A	H2	S
15	4x14	65	95	115	2.8	160	84	50.5	15	9.5	9

