



FIRE VALVE DN65 PN16


Straight type

90-00000017
356622

DESCRIPTION: Bronze RG5 body soft sealing fire valve. Rising stem with bolted bonnet. Straight hose connection. Raised face flanged inlet, BSP male threaded outlet.



STANDARD & DESIGN:

End Standard	EN 1092-3 (Inlet), ISO 228-1 (Outlet)
Face To Face Standard	DIN 86211
Remark	Connection: PN16
Min temperature	-10°C
Max temperature	+60°C
Throughput Direction	Straight
End Type	Flanged/Threaded
Design Code	DIN 86211
Standard	DIN
Material Seat	NBR
Material Disc	Bronze
Material Body	Bronze
Sub Category	FIRE
Item Number	90-00000017
Category	Valve

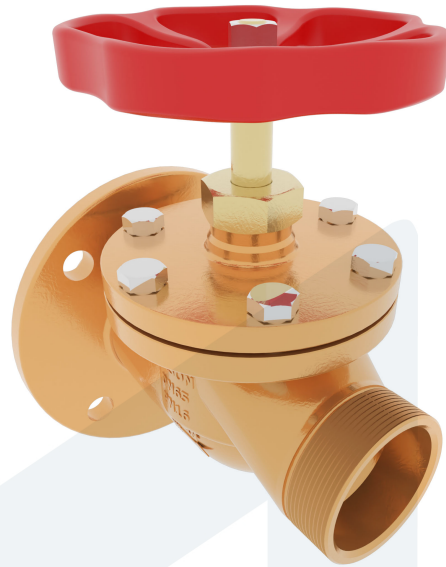

No	Part	Material	Code	Application
1	Body	Bronze	CC 491K	Sea water
2	Bonnet	Bronze	CC 490K	Water
3	Disc	Bronze	CC 491K	
4	Disc sealing ring	NBR		
5	Stem	Brass	CW 602N	
6	Bonnet gasket	NBR		
7	Gland packing	PTFE		
8	Handwheel	Bronze	CC 491K	

DN	Pressure Rating Id	nxdd	Hcd	Ø D	L	Kg	H	G	Ø M
65	16	4x18	145	185	200	10.9	185	2 1/2"	150

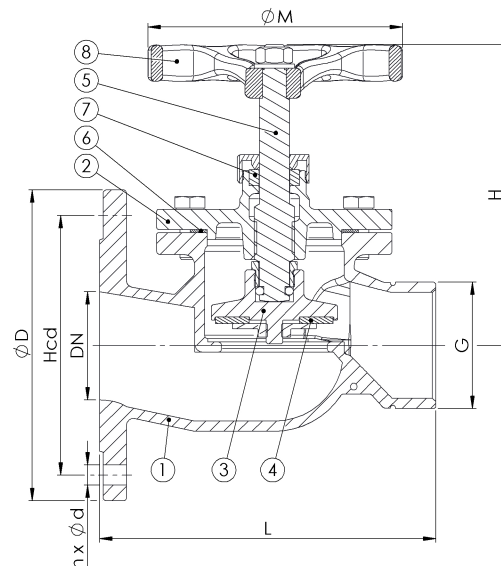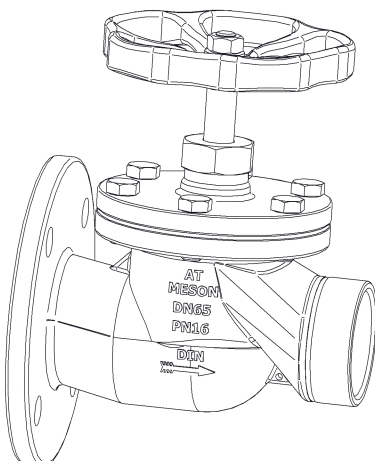

2022-11-09